

Tank Vent Check Valves Type RM (PN10)


RM with PN10 flange - DN 40-175

Standard type

Galvanised steel (thickness according IACS rules)
With PE Float ball
With Flange acc. DIN 2576 PN10
Airflow Velocity: max. 4 m/s
With Screen

Options

No Screen
Other Flange Connection

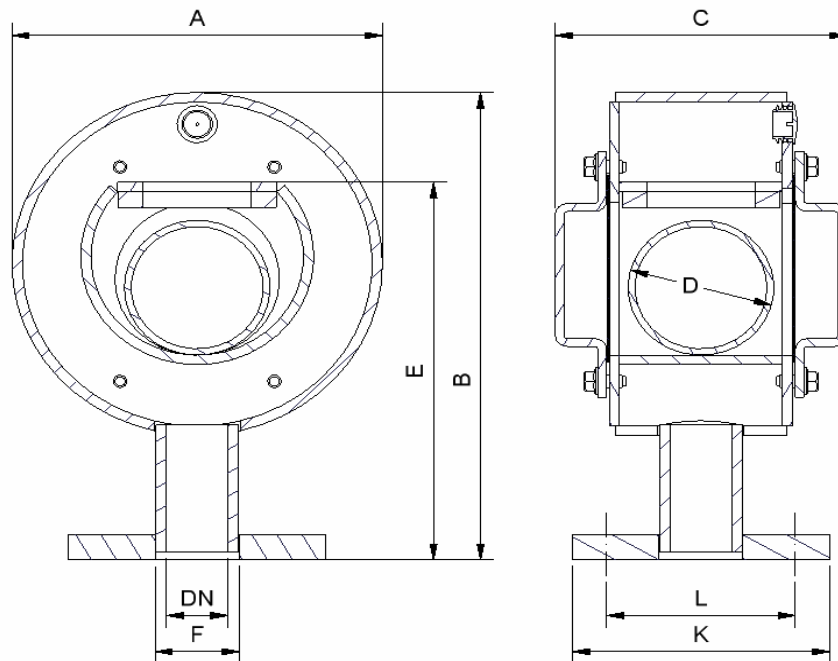

DN	40	50	65	80	100	125	150	175
A	216	216	275	275	347	414	496	496
B	294	294	354	354	422	506	590	590
C	170	170	220	220	250	290	340	340
D	85	85	120	120	145	185	240	240
E	238	238	281	281	332	404	465	465
F (Ø)	48.3	60.3	76.1	88.9	114.3	140	168.3	193.7
K	150	165	185	200	220	250	285	315
L Stc.	110	125	145	160	180	210	240	270
L boltholes	4 / Ø18	4 / Ø18	4 / Ø18	8 / Ø18	8 / Ø18	8 / Ø18	8 / Ø22	8 / Ø22
Weight in kg	12	12	19	20	30	43	61	63

(all sizes in mm)

Tank Vent Check Valves Type RM (PN10)


RM with PN10 flange - DN 200-450

Standard type

Galvanised steel (thickness according IACS rules)
With PE Float ball (2)
With Flange acc. DIN 2576 PN10
Airflow Velocity: max. 4 m/s
With Screen (2)

Options

No Screens
Other Flange Connection

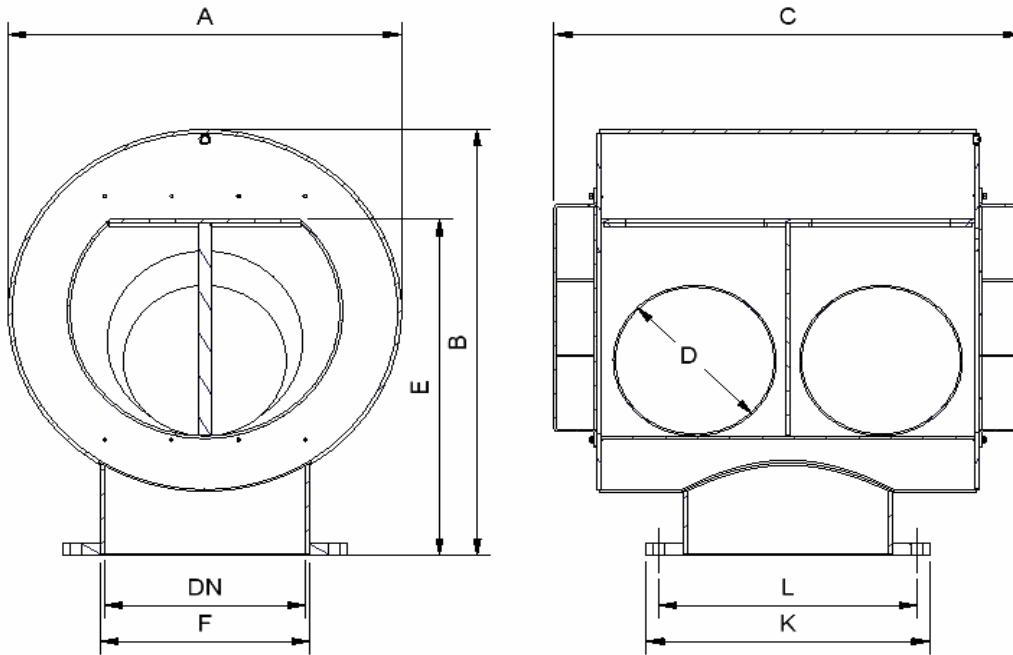

DN	200	250	300	350	400	450
A	414	502	593	646	784	876
B	531	650	733	800	918	1005
C	585	705	820	890	932	1250
D	185	240	300	325	325	360
E	432	526	588	661	725	823
F (Ø)	219.1	273	324	368	419	479
K	340	395	445	505	565	615
L Stc.	295	350	400	460	515	565
L boltholes	8 / Ø22	12 / Ø22	12 / Ø22	16 / Ø22	16 / Ø26	20 / Ø26
Weight in kg	76	112	151	190	274	343